

Emergency Exit Light


Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

This **Emergency Exit Light** has single or double universal faces with optional red or green letters. Switchable red or green functionally makes it suitable for multiple state and local regulations. Can be mounted on the wall, top or edge and easy installation in minutes. It can be used for up to 90 minutes after being 24 hours fully charged.



DIMENSION

Length:	11.61"
Width:	7.22"
Height:	1.59"

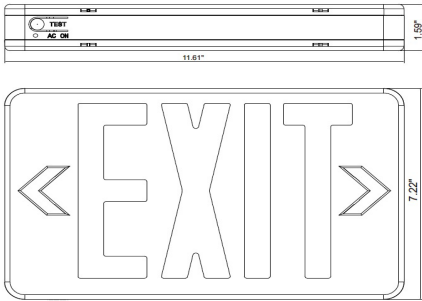

TECHNICAL SUMMARY

MODEL #	NAME	VOLTAGE	COLOR	BATTERY	RECHARGE TIME	EMERGENCY OPERATION	LED CHIPS	WATTAGE	LUMEN	CRI
IMJ-30	Red Exit Sign	120/277V	Red	build-in 1.2V	≤24hrs	≥90mins	12	N/A	N/A	80
IMJ-30G	Green Exit Sign		Green				6			
IMJ-30RG	Red/Green Exit Sign		Red/Green				12			

ELECTRICAL

- Dual 120/277V voltage. Optional multi-tap voltage available.
- Built-in 1.2V 700mAH rechargeable Ni-cd battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.

MOUNTING

- Innovative, easy installation in minutes.
- Universal J-box mounting pattern.

- Single or double face (Universal).
- Optional RED or GREEN letters.

HOUSING

- Injection-molded thermoplastic ABS housing.
- 5VA flame rating.

WARRANTY/LISTING

- Two years warranty on all electronics and housing. Two years warranty for battery meets UL 924.
- cUL and UL listed for damp location (0°C-40°C).