

IMHBS23-115W-50K



115W Linear High Bay Fixture

| | | | | | |
|---------------|---------------|-------------|-------|-------|-------|
| Project Name: | Order Number: | Prepare by: | Note: | Date: | Type: |
| | | | | | |

115 WATTS

The IMHBS23-115W-50K series
 These Single panel LED linear high bay light fixtures are excellent for perfect solution for commercial lighting needs in garages, warehouses and other commercial spaces. They are designed to replace your existing fluorescent or halogen high bays for more modern, efficient, and safe lighting. These fixtures are UL certified.





MOUNTING (INCLUDED)

DIMENSION



Hook and Chain

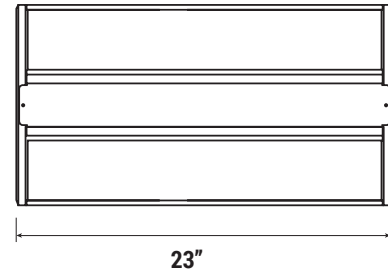

TECHNICAL SUMMARY

| LUMENS | WATTS | EFFICACY | CRI | VOLTAGE | BEAM ° | CCT | PF | LIFE | OPERATING TEMP. |
|--------|-------|----------|-----|--------------|--------|-------|------|------------|-----------------|
| 18000 | 115W | 135 lm/W | 80 | 120V 277V | 120 | 5000K | >0.9 | 50,000 hrs | -40°F ~ 104°F |

PART NUMBER ORDERING SUMMARY

I M H B S 2 3 - 1 1 5 W - 5 0 K

IUS HIGH BAY

115W
Wattage

5000K
CCT

115W Linear High Bay Fixture

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Type: |
|---------------|---------------|-------------|-------|-------|-------|
| | | | | | |

CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink, and lens.
- High quality frosted PC lens.
- Efficiency LED array.
- Diffuse for uniform illumination.
- CRI 80+

DRIVER

- 120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.

MOUNTING

- Ceiling mounting
- Pendant Mount

LISTING

- UL 8750 LED equipment in Lighting Products

WARRANTY

- 5 years manufacturer warranty, consult www.mwfor.com for more details.
 * Terms and conditions may apply.

*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in materials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

ACCESSORIES (SOLD SEPARATELY)



MHV-8W-EM

- Input Voltage 120-277V
- 8W Output
- Output Voltage 150-200Vdc



MHV-25W-EM

- Input Voltage 120-347V
- 25W Output
- Output Voltage $\leq 175Vdc$

OCCUPANCY SENSORS (SOLD SEPARATELY)



MBRI819-B-O

- 120-277v On/off Passive
Infrared Occupancy Sensor



MBRI819-B-D

- Bi-level passive infrared
Occupancy sensor