


TECHNICAL SUMMARY

MODEL #	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	ССТ	PF	LIFE	OPERATING TEMP.
MRSD026W-DBA-5CCT-WH	370	6W	62 lm/W	90	120V, 60 Hz	95°	2700K/ 3000K/ 3500K/ 4000K/ 5000K	>0.9	50,000 hrs	-5°F ~ 104°F





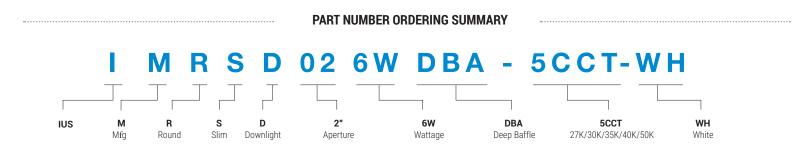

Deep Baffle Can-less Slim Recessed Downlight with 5CCT Selector - White

Project Name:	Order Number:	Prepare by:	Note:	Date:	Туре:

CONSTRUCTION

Unit includes spinning metal housing, LED array, heat sink, lens, and foam gasket with deep baffle white ring.

OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

MOUNTING

- Can-less design, no can housing needed for the installation
- Pre-installed torsion spring clips
- Junction box included
- Quick wiring, no wiring nuts and electrical tap needed for the installation


LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

PHOTOMETRY



RECOMMENDED DIMMERS

LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

LEVITON

- R00-RNL06-TW
- R50-IPL06-10M

COMPATIBLE PRODUCTS (SOLD SEPARATELY)



MRSDMP-346 Mounting plate for 3"/4"/6" can-less downlight



MRSDMP-468 Mounting plate for 4"/6"/8" can-less downlight



M3FTCABLE M10FTCABLE 3ft/ 10ft Extension cord for can-less downlight

ILLUMINATING US, LLC 813 W Elgin St Broken Arrow, OK 74012 2/2 TEL: 918-804-7618 E-mail: Info@Illuminatingus.com