

# E-1 LED Low Profile, Thermoplastic Emergency Light



**ILLUMINATING US**  
lighting

Type: \_\_\_\_\_

## STANDARD



## ILLUMINATION

- Adjustable long lasting, efficient, ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all-inclusive lamp, reflector and lens assembly.

## ELECTRICAL

- Dual 120/277 voltage standard. Optional dual 120/230 voltage available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Surface mount back plate fits most standard size junction boxes and snaps into place.
- Suitable for wall or ceiling mount.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.


## OPTIONS

- SPV: UL Listed for special voltage option.

## WARRANTY / LISTING

- One year warranty on all electronics and housing.
- UL Listed for damp locations (0°C – 30°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

## DIMENSIONS

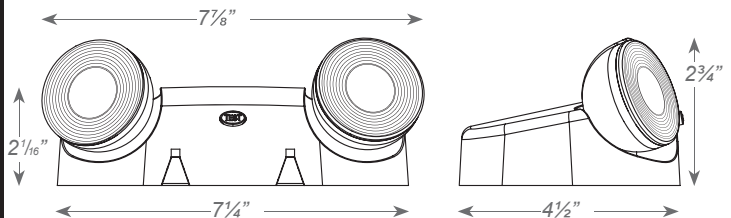

## ORDERING INFORMATION

Sample Part Number: E-1

MODEL	HOUSING COLOR		OPTIONS	
E-1	Blank	White	RC	Remote Capacity
	B	Black	SPV	120/230 Volt 50/60Hz

# E-1 LED Low Profile, Thermoplastic Emergency Light

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
E-1	0.33	0.33	0.37	0.046	0.044	0.052
E-1 RC	0.52	0.52	0.60	0.068	0.068	0.070

## REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
E-1-RC	3.6V	1W	X		X										