

ECO ROUND STRINGER R4



 Anti-impact

 IP65

 Recycle

 Injection molding cord, strong tensile strength

 Smaller size, only 1/3 of the conventional luminaire

 Long Life 10 years OK

 120VAC 60Hz

 CRI ≥80

 Dimmable

 IP65

 5 years warranty

 LED PHILIPS 2835

 LM80

 ETL


 FCC



SPECIFICATIONS


ITEM#	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	DIMMABLE	WATER PROOF	WIRE SIZE	LENGTH
BWSTL-R4-5-D	AC 120V	65W	125LM/W	8000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	50ft
BWSTL-R4-10-D	AC 120V	130W	125LM/W	16000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	100ft

DIMENSIONS

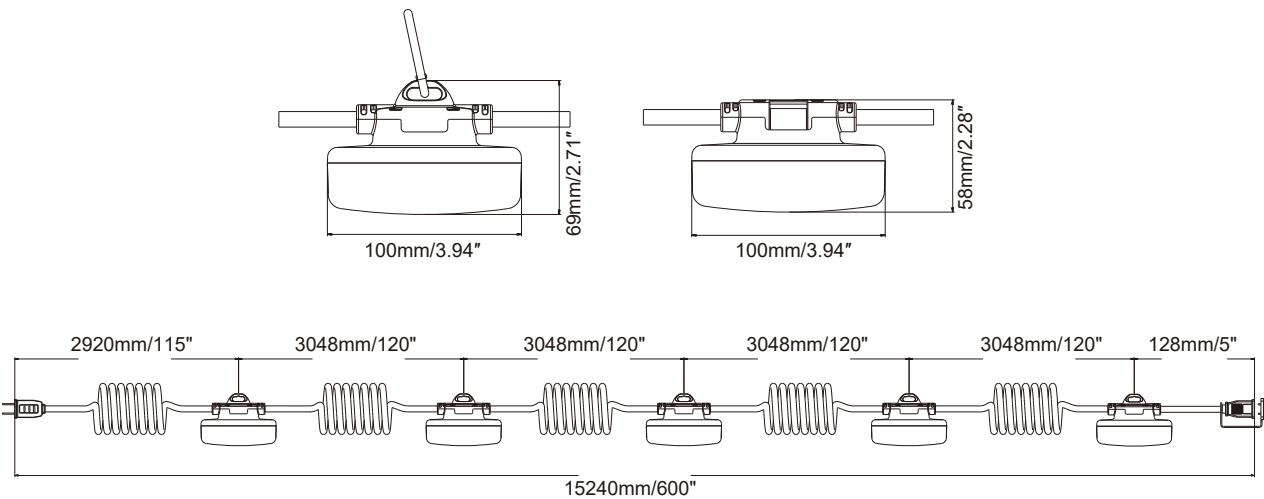


LINKABLE UNITS

BWSTL-R4-5
5 lamps one set

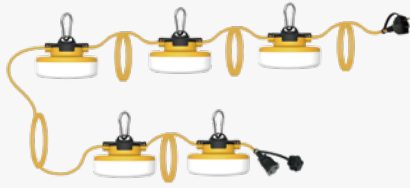

65W Maximum link 6 sets(18 AWG), 10 sets(16 AWG)

BWSTL-R4-10
10 lamps one set


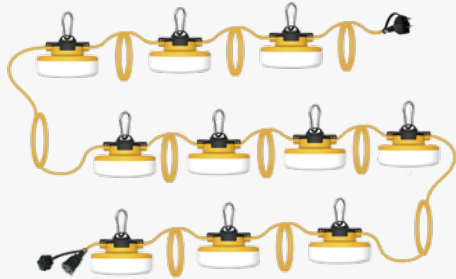


130W Maximum link 3 sets(18 AWG), 5 sets(16 AWG)

LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	25 lamps one set	L=250ft (76m)
20 lamps one set	L=200ft (61m)	30 lamps one set	L=300ft (91m)

FEATURES

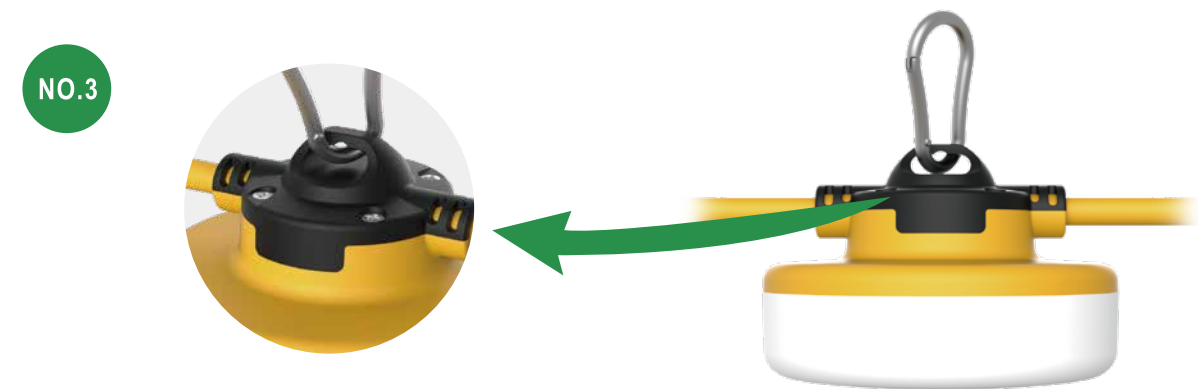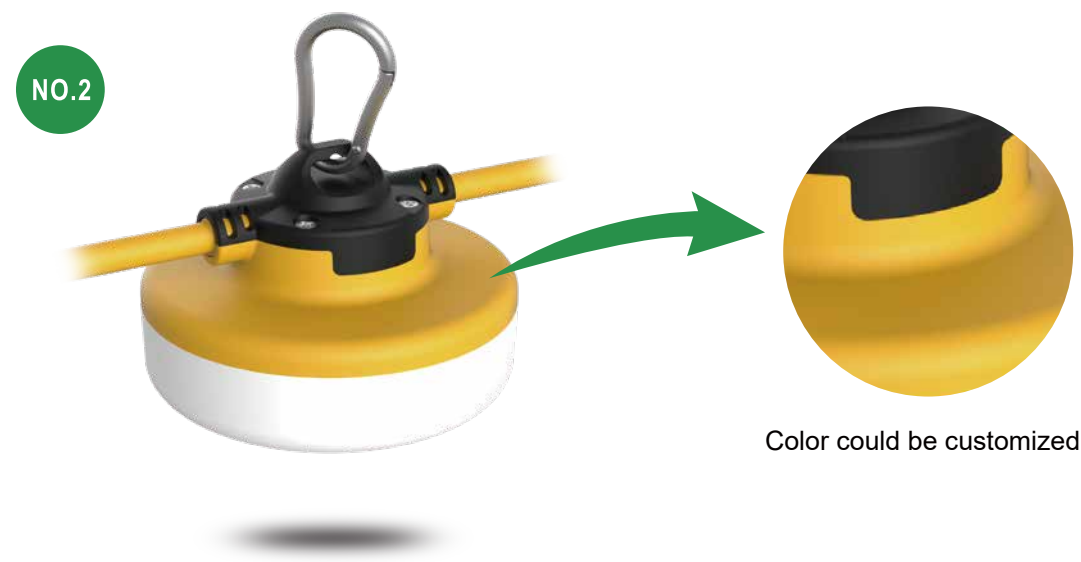


PC: Application temperature up to 120℃
More strength & stable, meet real IP65

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
65	22*22*19	45.5*45.5*21	0.455	0.455	0.21	0.043	4	2416	5976
130	44*22*19	45.5*45.5*21	0.455	0.455	0.21	0.043	2	1194	2988

APPLICATIONS

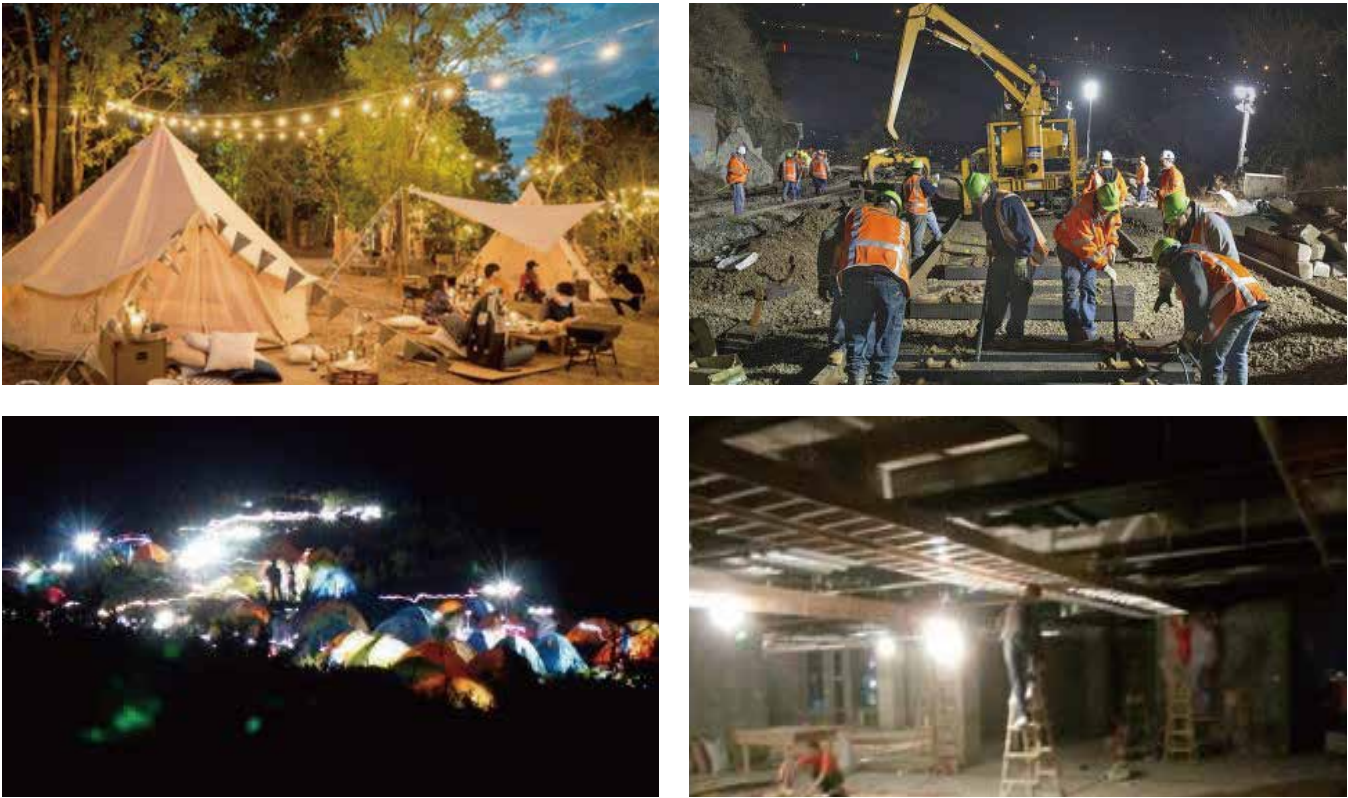

ILLUMINATING US, LLC
813 W Elgin St Broken Arrow, OK 74012
TEL: 918-804-7618 E-mail: Info@illuminatingus.com

CATALOG NUMBER BREAKDOWN

BWSTL-R4-X-X

BW	STL	R4	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	R4	5=5 lamps 10=10 lamps	Any number Word or Phrase