

NEW


HIGH BAY WORK LIGHT W3



SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	CHIPS	CCT		LM@5000K ±5%	PF	CRI	CORD & PLUG	STAINLESS STEEL GUARD	WORKING TEMP	WARRANTY
W3-6-X	120Vac 60Hz	60W	Lumileds 2835	2700K/ 3000K/ 4000K/ 5000K/	5700K/ 6000K/ 6500K	7800LM/ 9000LM	>0.9	>80	SJTW 16/3 or 18/3 AWG 10ft cord+plug	Yes	(-40°C~45°C) (-40°F~113°F)	5 years
W3-10-X	120Vac 60Hz	100W	Lumileds 2835	2700K/ 3000K/ 4000K/ 5000K/	5700K/ 6000K/ 6500K	13000LM/ 15000LM	>0.9	>80	SJTW 16/3 or 18/3 AWG 10ft cord+plug	Yes	(-40°C~45°C) (-40°F~113°F)	5 years
W3-15X	120Vac 60Hz	150W	Lumileds 2835	2700K/ 3000K/ 4000K/ 5000K/	5700K/ 6000K/ 6500K	19500LM/ 22500LM	>0.9	>80	SJTW 16/3 or 18/3 AWG 10ft cord+plug	Yes	(-40°C~45°C) (-40°F~113°F)	5 years
W3-20-X	120Vac 60Hz	200W	Lumileds 2835	2700K/ 3000K/ 4000K/ 5000K/	5700K/ 6000K/ 6500K	26000LM/ 30000LM	>0.9	>80	SJTW 16/3 or 18/3 AWG 10ft cord+plug	Yes	(-40°C~45°C) (-40°F~113°F)	5 years

DIMENSIONS

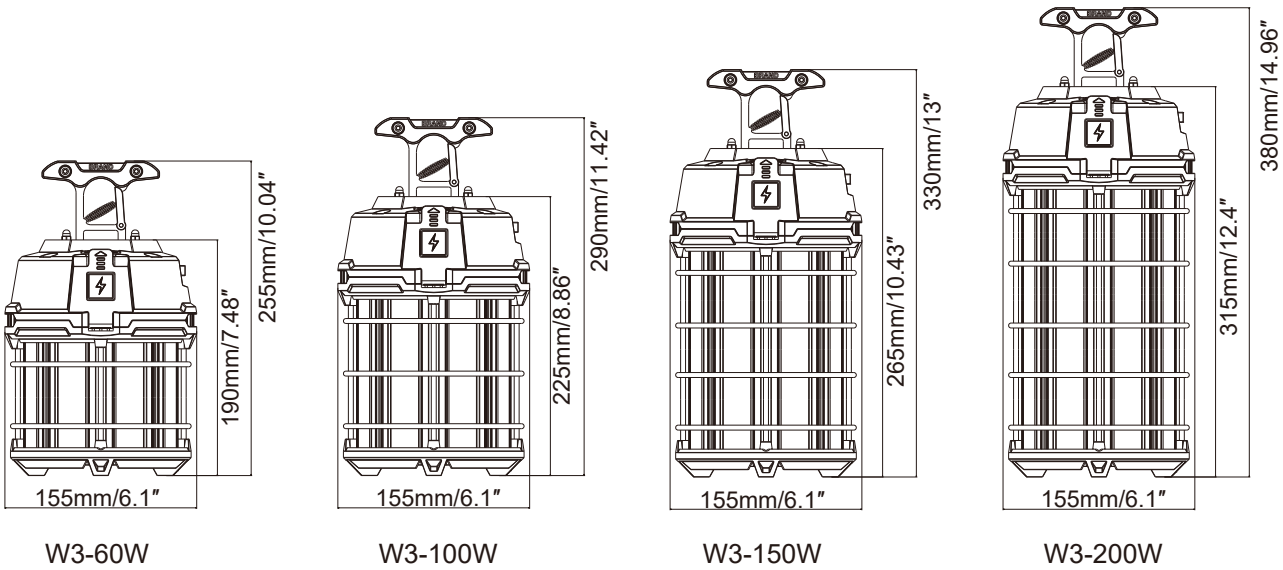

LINKABLE UNITS

Hidden & built-in connector design. Customer can choose to connect several work lights in series or not. Suitable to damp location. The length of the PVC connector can be customized.



Wattage	UL Current@ 120V	Link-able Qtys
200W	2	4pcs
150W	1.5	6pcs
100W	1	8pcs
60W	0.6	12pcs




FEATURES


NO.1 COLLAPSIBLE HOOK
1. Save packing, save freight cost
2. Protect the hook during transportation



GOOD HEAT DISSIPATION NO.2

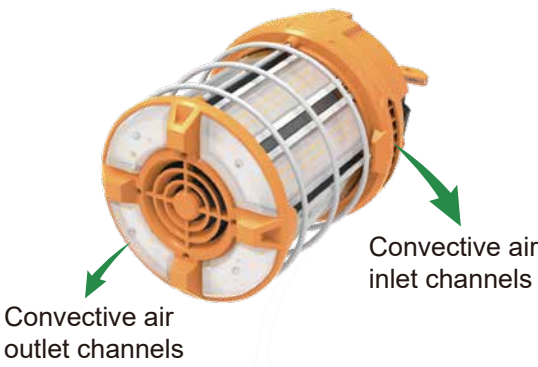

NO.3

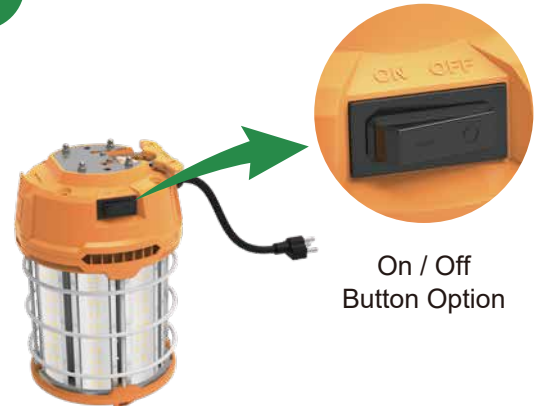

On / Off
Button Option

NO.4 STACKABLE DESIGN
The radian of the top cover is consistent with the base and can be stacked



NO.5 Bracket mounting holes are reserved for self-installation



NO.6



Color Can be Customized

ILLUMINATING US, LLC
813 W Elgin St Broken Arrow, OK 74012
TEL: 918-804-7618 E-mail: Info@illuminatingus.com

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
60	17.8*17.8*26.5	37*37*28.5	0.039	4	2660	6660
100	17.8*17.8*30	37*37*32	0.044	4	2360	5900
150	17.8*17.8*34	37*37*36	0.049	4	2080	5200
200	17.8*17.8*39	37*37*41	0.056	4	1856	4640

APPLICATIONS



CATALOG NUMBER BREAKDOWN

W3-6-X

W3	6	X
Series	Wattage	CCT
Work Light G3	6=60W 10=100W 15=150W 20=200W	27=2700K 30=3000K 35=3500K 45=4500K 40=4000K 50=5000K 57=5700K