

ROUND STRINGER R2



- 

Anti-impact
- 

IP65
- 

Recycle
- 

Injection molding cord, strong tensile strength
- 

Smaller size, only 1/3 of the conventional luminaire

- 

Long Life 10 years OK
- 

120VAC 60Hz
- 

CRI ≥80
- 

Dimmable
- 

IP65
- 

5 years warranty
- 

LED PHILIPS 2835
- 

LM80
- 

ETL
- 


FCC



SPECIFICATIONS

ITEM#	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	DIMMABLE	WATER PROOF	WIRE SIZE	LENGTH	PLASTIC COVERS
BWSTL-R2-5-D	AC 120V	65W	125LM/W	8000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	50ft	Optional
BWSTL-R2-10-D	AC 120V	130W	125LM/W	16000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	100ft	Optional

DIMENSIONS

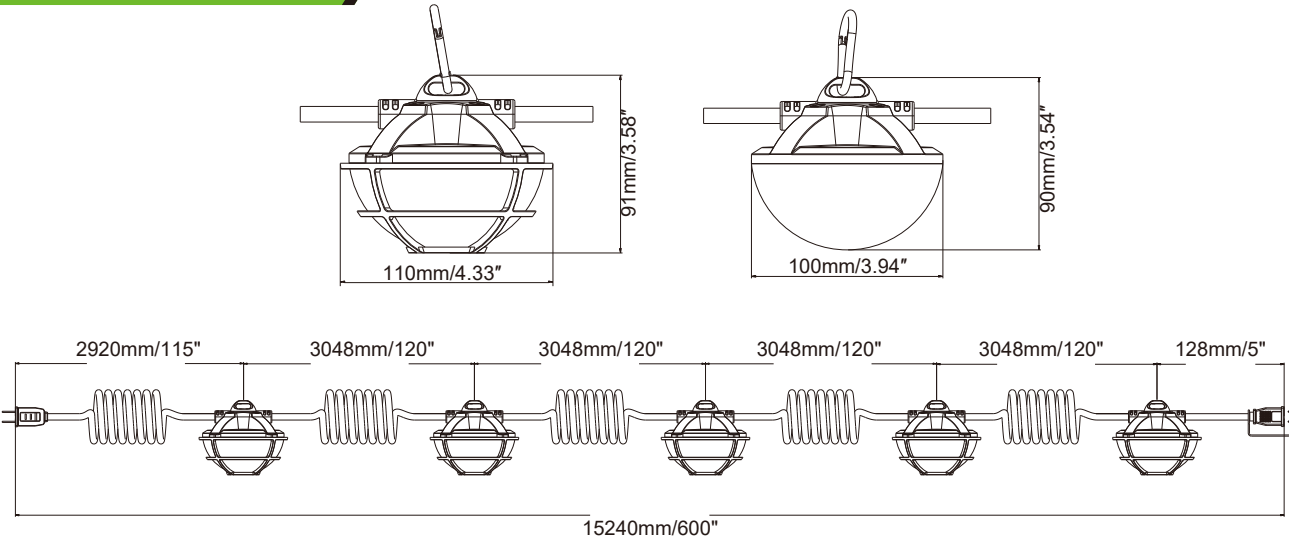



LINKABLE UNITS

BWSTL-R2-5 5 lamps one set	BWSTL-R2-10 10 lamps one set
	
65W Maximum link 6 sets(18 AWG), 10 sets(16 AWG)	130W Maximum link 3 sets(18 AWG), 5 sets(16 AWG)

LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	25 lamps one set	L=250ft (76m)
20 lamps one set	L=200ft (61m)	30 lamps one set	L=300ft (91m)


FEATURES

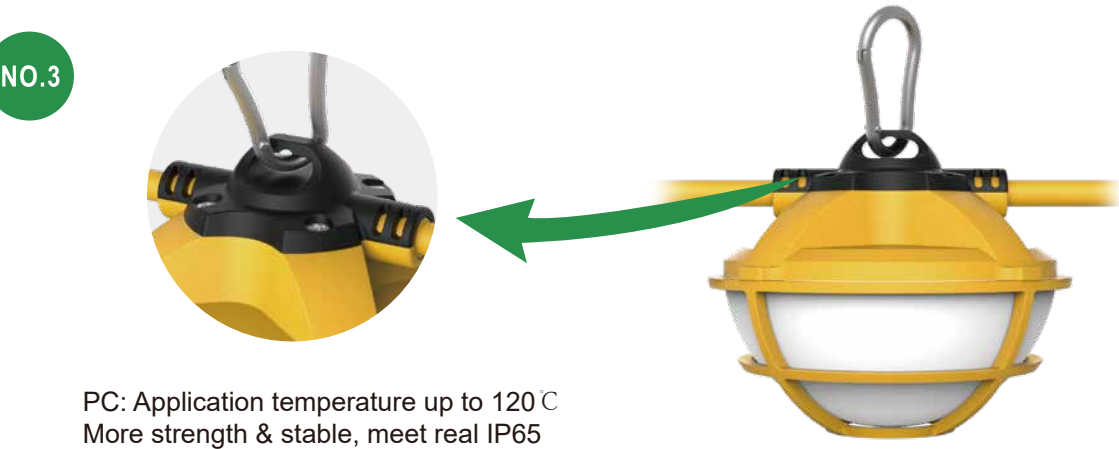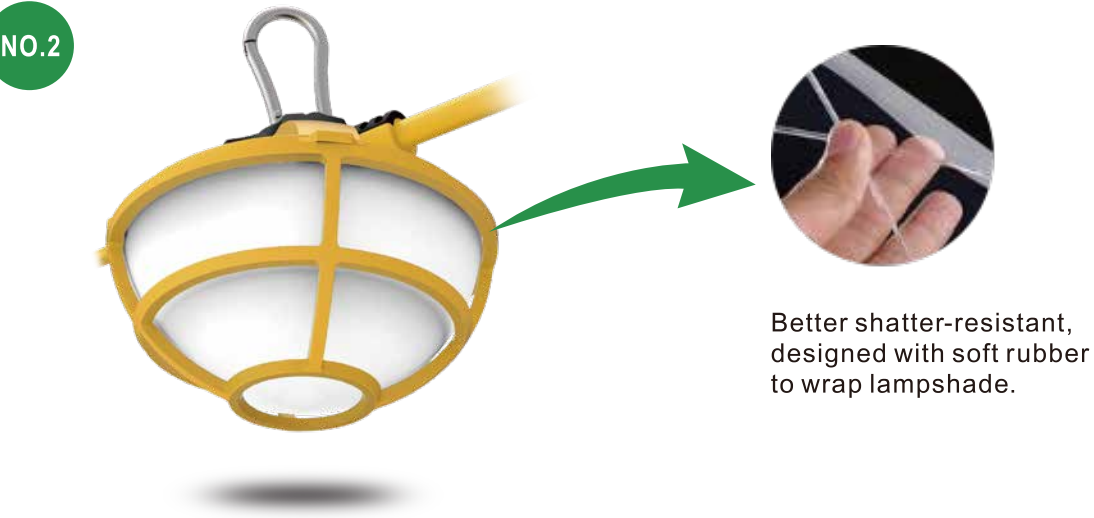

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
65	25*21*19	51.5*43.5*21	0.515	0.435	0.21	0.047	4	2420	5520
130	42*25*19	51.5*43.5*21	0.515	0.435	0.21	0.047	2	1210	2760

APPLICATIONS

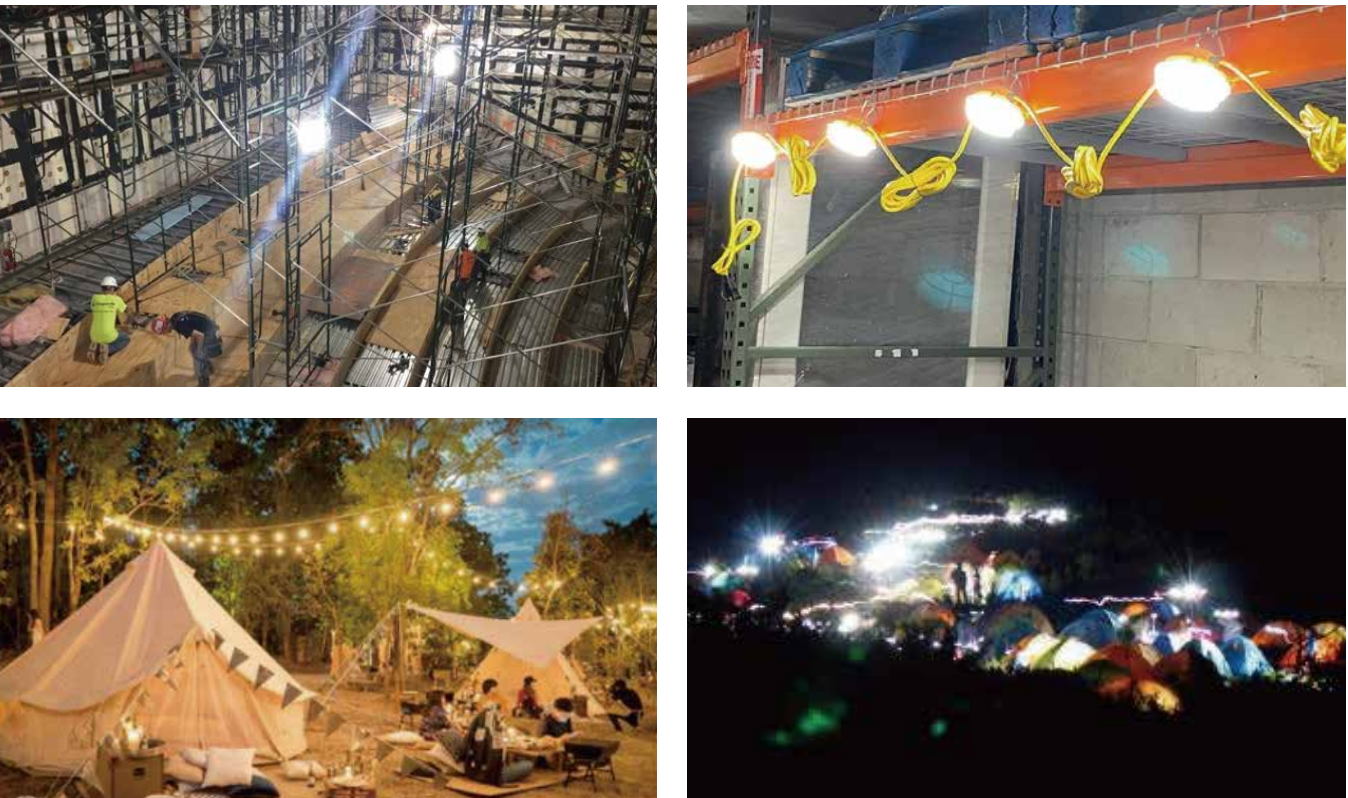

ILLUMINATING US, LLC
813 W Elgin St Broken Arrow, OK 74012
TEL: 918-804-7618 E-mail: Info@illuminatingus.com

CATALOG NUMBER BREAKDOWN

BWSTL-R2-X-X

BW	STL	R2	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	R2	5=5 lamps 10=10 lamps	Any number Word or Phrase