

ROUND STRINGER

R3



-  Anti-impact
-  IP65
-  Recycle
-  Injection molding cord, strong tensile strength
-  Smaller size, only 1/3 of the conventional luminaire


-  Long Life 10 years OK
-  120VAC 60Hz
-  CRI ≥80
-  Dimmable
-  IP65
-  5 years warranty
-  LED PHILIPS 2835
-  LM80
-  ETL
-  FCC



SPECIFICATIONS


ITEM#	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	DIMMABLE	WATER PROOF	WIRE SIZE	LENGTH
BWSTL-R3-5-D	AC 120V	65W	125LM/W	8000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	50ft
BWSTL-R3-10-D	AC 120V	130W	125LM/W	16000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	100ft

DIMENSIONS

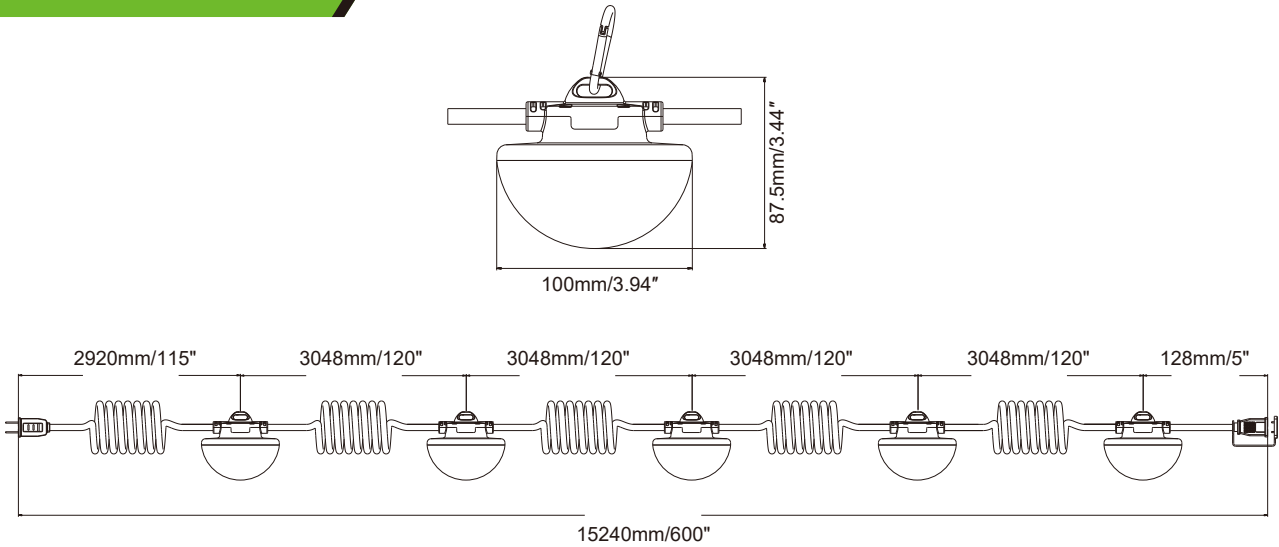


LINKABLE UNITS

BWSTL-R3-5 5 lamps one set

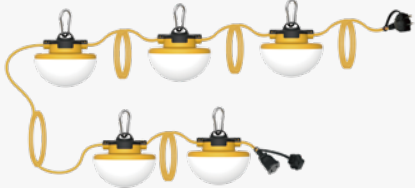

65W Maximum link 6 sets(18 AWG), 10 sets(16 AWG)

BWSTL-R3-10 10 lamps one set


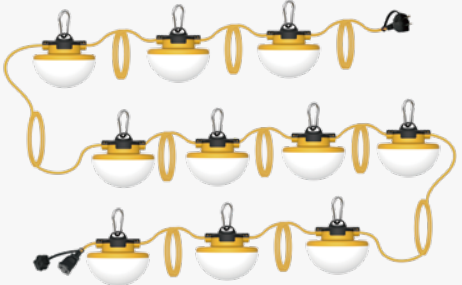


130W Maximum link 3 sets(18 AWG), 5 sets(16 AWG)

LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	25 lamps one set	L=250ft (76m)
20 lamps one set	L=200ft (61m)	30 lamps one set	L=300ft (91m)

FEATURES

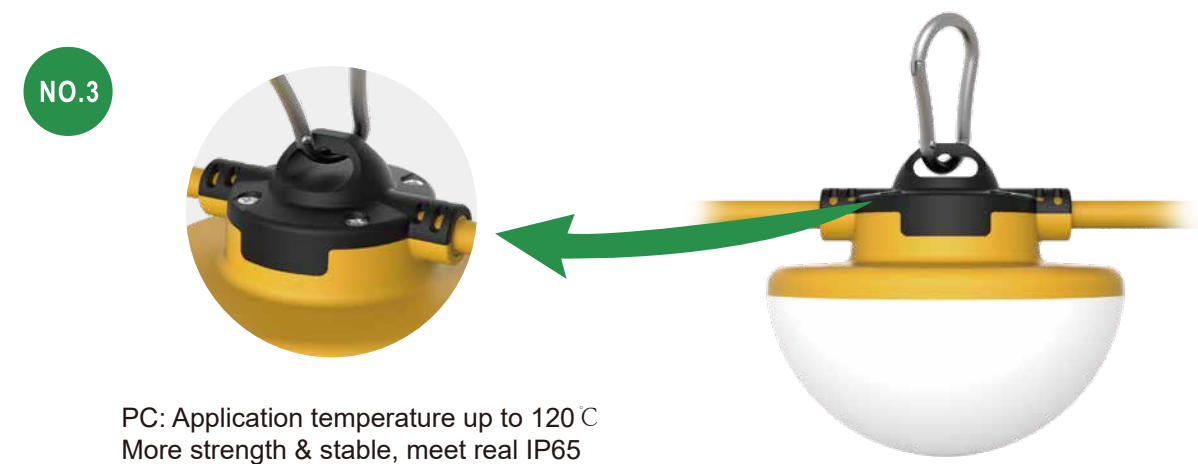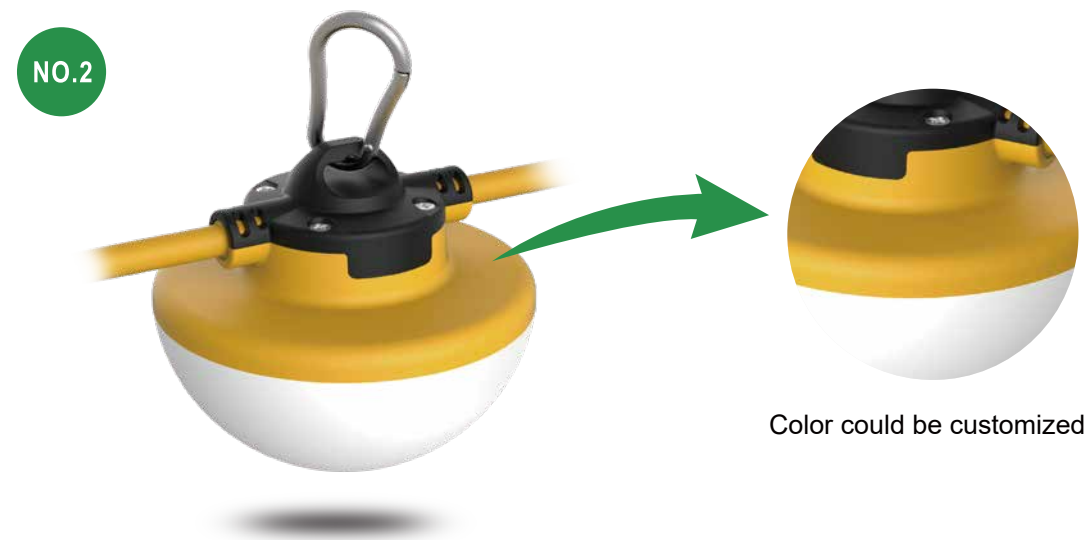

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
65	25*21*19	51.5*43.5*21	0.515	0.435	0.21	0.047	4	2420	5520
130	42*25*19	51.5*43.5*21	0.515	0.435	0.21	0.047	2	1210	2760

APPLICATIONS



ILLUMINATING US, LLC

813 W Elgin St Broken Arrow, OK 74012

TEL: 918-804-7618 E-mail: Info@illuminatingus.com

CATALOG NUMBER BREAKDOWN

BWSTL-R3-X-X

BW	STL	R3	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	R3	5=5 lamps 10=10 lamps	Any number Word or Phrase