

8' LED Strip Light with Wattage and CCT Selector




The IMST8FT-65-75-90W-3CCT series

These LED Linear Strip Luminaires are excellent for general utility applications like garage, warehouse, offices, storage units, stairwell. Color temperature can be switch to 3500K neutral white, 4000K cool white and 5000K daylight. The input wattage can be adjustable to 3 different level that helps you to save energy cost. These fixtures are DLC and UL certified. They are popular in office, warehouse, public area and other commercial area.





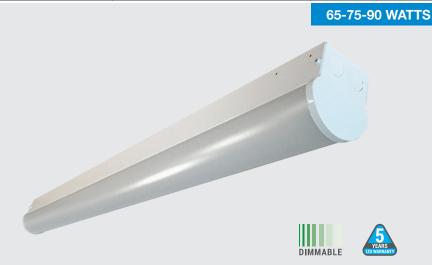






Select color temperature from

- 3500K NATURAL WHITE
- 4000K COOL WHITE
- 5000K DAYLIGHT







TECHNICAL SUMMARY

LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	ССТ	PF	LIFE	OPERATING TEMP.
8450 9750 11700	65W 75W 90W	130 lm/W	80	120V, 277V	120	3500K 4000K 5000K	>0.9	100,000 hrs	-40°F ~ 104°F

PART NUMBER ORDERING SUMMARY







Project Na	me:	Order Number:	Prepare by:	Note:	Date:	Туре:

CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink, lens.
- · High quality PC lens.
- · Efficiency LED array.
- · Diffuse for uniform illumination.
- CRI 80+

DRIVER

- •120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.

MOUNTING

- · Surface mounting
- Pendant mounting

LISTING

- DLC Listed
- •UL 8750 LED equipment in Lighting Products

WARRANTY

5 years manufacturer warranty

* Terms and conditions may apply.

*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in mate-rials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

ACCESSORIES (SOLD SEPARATELY)



MHV-8W-EM

- Input Voltage 120-277V
- 8W Output
- Output Voltage 150-200Vdc



MHV-25W-EM

- Input Voltage 120-347V
- 25W Output
- Output Voltage ≤ 175Vdc

OCCUPANCY SENSORS (SOLD SEPARATELY)



MBRI819-B-0 120-277v On/off Passive Infrared Occupancy Sensor



MBRI819-B-D Bi-level passive infrared Occupancy sensor

