


DEFORMABLE WORK LIGHT


W2



SPECIFICATIONS

ITEM#	INPUT VOLT.	WATT	CHIPS	CCT		LM@5000K ±5%	PF	CRI	CORD & PLUG	STAINLESS STEEL GUARD	WORKING TEMP	WARRANTY
W2-10-X	120Vac 60Hz	100W	Lumileds 2835	2700K/ 3000K/ 4000K/ 5000K/	5700K/ 6000K/ 6500K	12000LM	>0.9	>80	SJTW 16/3 or 18/3 AWG 10ft cord+plug	Yes	(-40°C~45°C) (-40°F~113°F)	5 years
W2-13-X	120Vac 60Hz	130W	Lumileds 2835	2700K/ 3000K/ 4000K/ 5000K/	5700K/ 6000K/ 6500K	15600LM	>0.9	>80	SJTW 16/3 or 18/3 AWG 10ft cord+plug	Yes	(-40°C~45°C) (-40°F~113°F)	5 years

DIMENSIONS

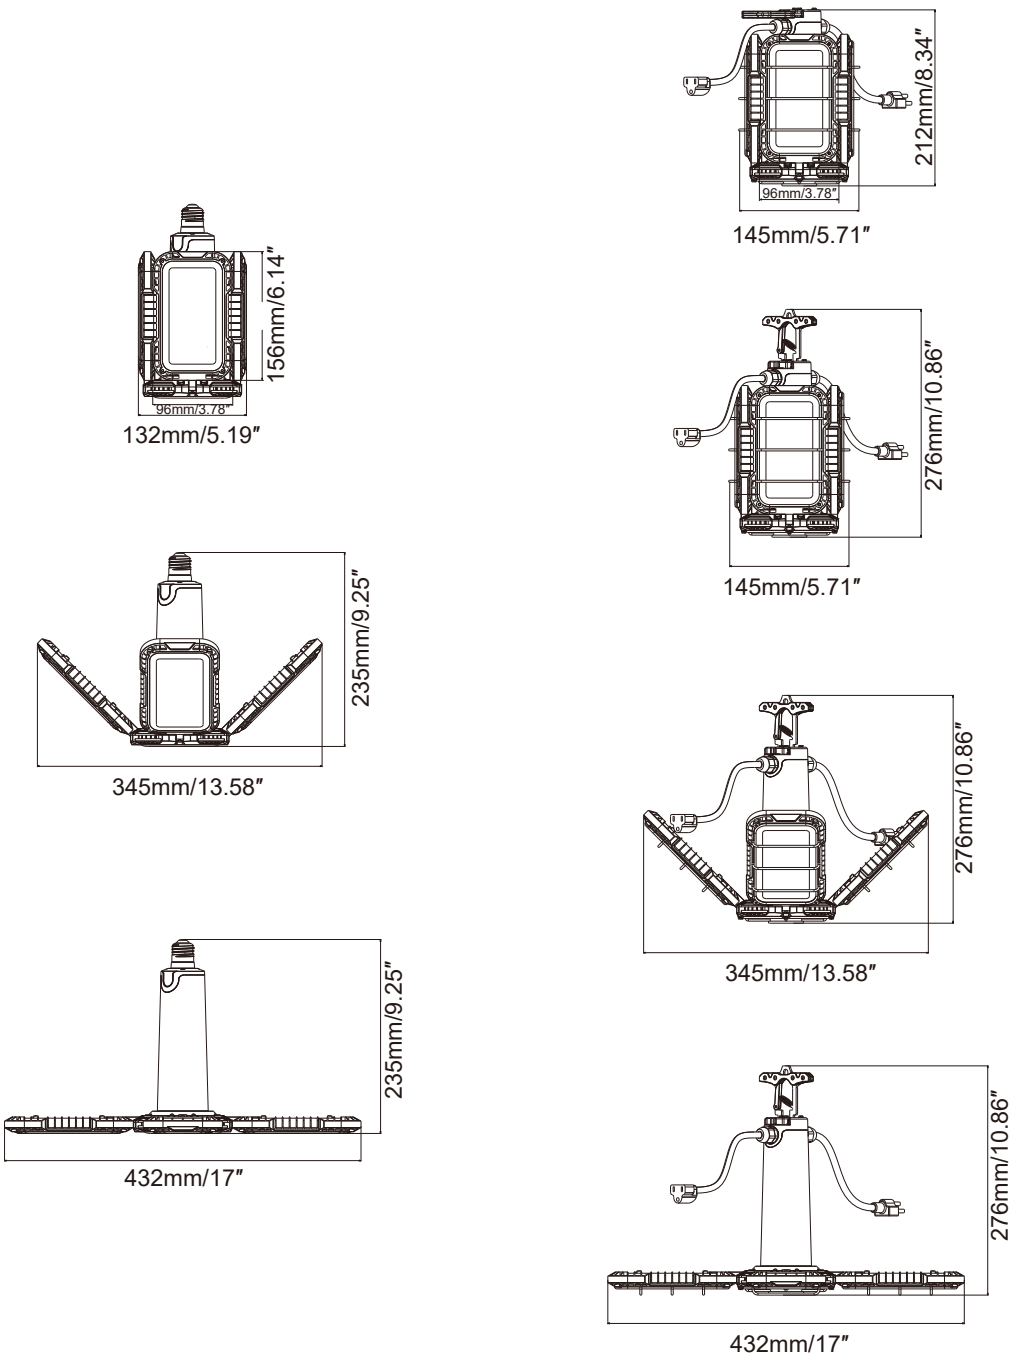

FEATURES

NO.1



COLLAPSIBLE HOOK
1. Save packing, save freight cost
2. Protect the hook during transportation

NO.2



Reserve a safety rope hanger hole

NO.3

Beam angle adjustable, meet more application environments



360°

270°

120°

NO.4

Linkable, it shines over a much wider area



NO.5



E26/E27 base lamp, used as garage light or high bay lamp(stainless steel guard could be removed)

- 1. Save tariff, 2% tariff for lamps to US
- 2. Hook connector option, used as high bay fixture

NO.6



Color could be customized

ILLUMINATING US, LLC

813 W Elgin St Broken Arrow, OK 74012

TEL: 918-804-7618 E-mail: Info@illuminatingus.com

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
100/130	19.6*17*25.8	40.8*35.5*27.8	0.408	0.355	0.278	0.040	4	2500	6500

APPLICATIONS



CATALOG NUMBER BREAKDOWN

W2-10-X

W2	10	X
Series	Wattage	CCT
Work Light G2	10=100W 13=130W	27=2700K 30=3000K 35=3500K 45=4500K 40=4000K 50=5000K 57=5700K