

LED Landscape Well Light

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:


The IMLWL series features a die-cast aluminum lighting body with a frosted PC lens, designed for standard United States junction pipes. Available in black or ORB body finishes, it is suitable for wet locations and ensures easy installation. Operating efficiently on 12-24V AC/DC, it functions within a temperature range of -4°F to 104°F. With a power consumption of 6W, a CRI of >90Ra, and a copper cable material, it delivers 450-520 lumens with a 5CCT color temperature. The fixture has a lifespan of 50,000 hours and utilizes SMD2835 LEDs with a 52° beam angle. Rated IP65, it is ideal for low-voltage landscape lighting applications, including pathways, driveways, decks, and gardens.



MLWL-6W-30K-FLAT



DIMENSION

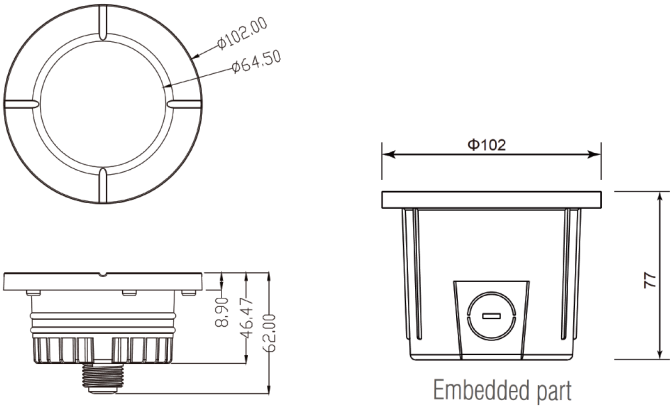

TECHNICAL SUMMARY

MODEL NO.	TOP	WATTS	LUMENS	CCT	VOLTAGE	DIMMING	CRI	CERTIFICATION
IMLWL-6W-30K-FLAT	Open Flat Top	6W	520LM	27/30/35/40/50K	12-24V	N/A	N/A	ETL
IMLWL-6W-30K-LVER	Louver Top	6W	520LM	27/30/35/40/50K	12-245V	N/A	N/A	ETL
IMLWL-6W-30K-SHLD	Shielded Top	6W	520LM	27/30/35/40/50K	12-24V	N/A	N/A	ETL

PART NUMBER ORDERING SUMMARY

I

MLWL-6W-30K-FLAT

IUS

MFG

6W  
Wattage

30K  
CCT

Open Flat Top  
Various Top

LED Landscape Well Light

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink, hanger, security cable and high quality LED tube.

WARRANTY

5 years manufacturer warranty,  
\* Terms and conditions may apply.

MOUNTING

- 

HIGHLIGHT

Durable Construction

Made from die-cast aluminum, ensuring long-lasting durability and resistance to harsh outdoor conditon

Easy Installation

Designed for standard U.S. junction pipes, allowing for quick and hassle-free setup.